

Genie[®]
A TEREX BRAND



AERIAL WORK PLATFORMS



CUSTOMERS FIRST. ALWAYS.

PARTNERING FOR SUCCESS


Our dedication to lifting you higher extends well beyond the physical reach of our products. We thrive on building satisfying customer relationships founded on the idea of partnership. Because you, our customer, are at the centre of everything we do.

Since 1966, we've been developing products to solve your worksite challenges – and that process never ends. Our team of product managers and engineers uses your input to design new products, featuring the latest technology to meet your changing needs. Then we manufacture those products to stringent standards that help increase quality, lower costs and give you exceptional value for years to come.

PROVIDING SUPERIOR VALUE

Our commitment doesn't end with the sale. Our dedicated service teams are available to provide support when you need it most. Our extensive parts network ships most parts within 24 hours, too. Simply put, we're always working to help maximise your "up time" so you can be more successful.

Genie is driven by one goal: doing the right thing, at the right time for our customers. That's not just what we do; it's who we are. So tell us what you need. We're listening.

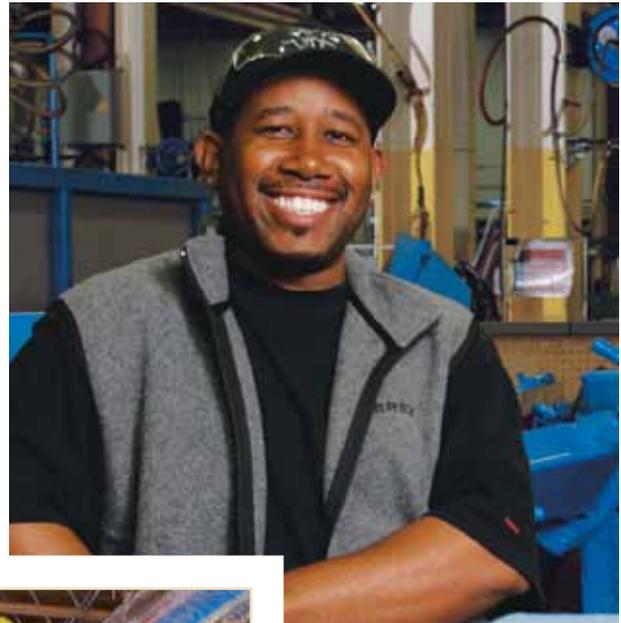

Genie
A TEREX BRAND

SETTING THE STANDARD

Genie manufactures some of the most advanced, highest-valued lift equipment in the industry. Genie distinctive blue lifts set the standard for performance and durability – not to mention support from people who understand your business.



CONVENIENCE

IN A COST-EFFECTIVE PACKAGE

Genie® aerial work platforms are easy to use and cost effective, making them the first choice for a wide range of applications. One person can easily set them up and get to work within minutes, providing the ideal all-around tool for almost any access application. Their light weight and compact size make Genie® aerial work platforms convenient to use in schools, churches, warehouses and more. Genie® aerial work platforms also provide solutions for internal work on large construction sites, like high rises, as well as being perfect for light-duty construction purposes.

Genie® aerial work platforms are designed to enhance productivity in the workplace. Flexible features on the AWP™ and Runabout™ models offer convenience at a low cost. Their lightweight construction makes them easy to manoeuvre, use and transport, delivering maximum uptime. Each model offers a variety of options and accessories to customise your machine. Genie® aerial work platforms offer an economical solution for all your access needs.

The patented Genie mast system is the most rigid in the industry.

CONVENIENT, VERSATILE ACCESS

Genie® AWP™ Super Series aerial work platforms are an industry favorite due to their ease of use, convenience and flexibility. Their lightweight manoeuvrability and durable design make them a versatile option for a wide variety of rental, light-duty construction and maintenance applications.



EASY TRANSPORT

The unique rear mast pivot bar and lightweight design allow it to be easily loaded into a ute. Outrigger storage and forklift pockets, tie-down attachment points and an overhead crane attachment point add transportation convenience.



The Genie® AWP™ Super Series is the top-selling aerial work platform in North America.



DURABLE MAST AND PLATFORM

The patented Genie mast system is the most rigid in the industry. Constructed of durable aircraft-quality aluminum, the mast provides user comfort and security at all working heights.

DOORWAY ACCESS AND MANOEUVREABILITY

All units roll through standard doorways for easy access, and models up to 9.1 m (30 ft) don't even need to be tilted back. An exclusive six-point wheel and caster rocker base system also manoeuvres easily around corners and over thresholds or debris.



A BASE TO FIT YOUR NEEDS

STANDARD BASE

Our most popular model, perfect for everyday applications.



USER-FRIENDLY CONTROLS

Controls include a low battery indicator, locking key switch and dual-activated up/down switch as well as outrigger setup confirmation lights. All AC and DC models are equipped with an auxiliary platform-lowering feature for descent in the event of a power failure.



AERIAL WORK PLATFORM MODELS AVAILABLE

AWP™-20S

AWP™-25S

AWP™-30S

AWP™-36S

AWP™-40S

STREAMLINING INVENTORY MANAGEMENT

The Genie® QuickStock™ (QS) lift is designed to make your inventory picking faster, easier and safer than rolling stairs or manually propelled lifts. An expansion of the versatile and popular Genie® Runabout product line, the QuickStock™ lift is both compact and easy to manoeuvre. It is available in two Runabout model heights (15 ft. and 20 ft.).



PRODUCTIVE SOLUTIONS

The Genie® Runabout™ (GR™) and Runabout™ Contractor (GRC™) are compact, low-weight machines well suited for increasing productivity on the job. Efficient operation and convenient setup make the Runabout™ ideal for warehousing, stock-picking, transporting, inventory management, and general maintenance. The construction-ready Runabout™ Contractor features a tube-in-tube telescoping mast and steel platform for durability in rougher environments.



DRIVING AND STEERING

Features include zero inside turning radius, 30% gradeability, a spring-applied hydraulically released brake system and 25 cm (10 in) non-marking solid rubber tyres. The unit is also driveable when fully elevated for increased productivity.

EASY CONTROL AND SERVICE

Platform controls are equipped with on-board diagnostics. Auxiliary platform lowering enables descent in the event of a power failure. Proportional drive controls provide a smooth ride. Plus, hinged rear covers allow easy access to all major components for convenient servicing.

A zero inside turning radius and full elevation drive feature deliver maximum productivity.



ADJUSTABLE WORKSTATION TRAY

All Stock Picker™ models come standard with a workstation tray that is adjustable from inside the platform.



QUICKSTOCK YOUR STOCK

With a capacity up to 500 lbs, or 350 lbs on the QS™-20, the QuickStock™ facilitates picking and placing large boxes from high stocking locations.



REACH FURTHER

The robust Runabout™ Contractor has a platform height of 3.66 m (12 ft) and a lift capacity of 227 kg (500 lbs).

The GRC™-12 also features a standard extension deck which provides a large work space for up to two operators and offers an extra 0.44 m (17.5 inches) of outreach.



COMPACT ACCESSIBILITY

Narrow 0.75 to 0.80 m (2 ft 5.5 in to 2 ft 7.5 in) width and 1.35 m (4 ft 5 in) length allows the GR™ and GRC™ models to fit in most passenger elevators. Units can be driven through doorways with operator on board and have 0.06 m (2.5 in) ground clearance in stowed position. Low 0.39 m (15.5 in) entry height.

GENIE® RUNABOUT™ FAMILY AND QUICKSTOCK™ MODELS AVAILABLE

GR™-15

GR™-20

GRC™-12

QS™-15

QS™-20

OPTIONS

FOR GENIE® RUNABOUT™ MODELS

	GR™-15	GR™-20	GRC™-12	QS™-15	QS™-20
PLATFORM					
WORKSTATION TRAY	S	-	S	-	-
STEEL PLATFORM AND EXTENSION DECK	-	-	S	-	-
WARNING					
MOTION ALARM	S	S	S	S	S
FLASHING BEACON	S	S	S	S	S
AUTOMOTIVE-STYLE HORN	O	O	O	O	O
POWER					
MAINTENANCE-FREE BATTERY	O	O	O	S	S

- = N/A O = OPTION S = STANDARD

SPECIFICATIONS

AERIAL WORK PLATFORMS

MODEL	WORKING HEIGHT		WIDTH		PLATFORM HEIGHT		LIFT CAPACITY	
	Metric	US	Metric	US	Metric	US	Metric	US
AERIAL WORK PLATFORMS								
AWP™-20S	8.12 m	26 ft 1 in	0.74 m	2 ft 5 in	6.12 m	20 ft 1 in	159 kg	350 lbs
AWP™-25S	9.57 m	30 ft 11 in	0.74 m	2 ft 5 in	7.59 m	24 ft 11 in	159 kg	350 lbs
AWP™-30S	11.00 m	35 ft 6 in	0.74 m	2 ft 5 in	9.00 m	29 ft 6 in	159 kg	350 lbs
AWP™-36S	13.10 m	42 ft 5 in	0.74 m	2 ft 5 in	11.10 m	36 ft 5 in	159 kg	350 lbs
AWP™-40S	14.29 m	46 ft 4 in	0.74 m	2 ft 5 in	12.29 m	40 ft 4 in	136 kg	300 lbs

SELF-PROPELLED AERIAL WORK PLATFORMS (GENIE® RUNABOUT™ and RUNABOUT™ CONTRACTOR)								
GR™-15	6.47 m	20 ft 8 in	0.75 m	2 ft 5.5 in	4.47 m	14 ft 8 in	227 kg	500 lbs
GR™-20	8.02 m	25 ft 9 in	0.80 m	2 ft 7.5 in	6.02 m	19 ft 9 in	159 kg	350 lbs
GRC™-12	5.66 m	18 ft	0.80 m	2 ft 7.5 in	3.66 m	12 ft	227 kg	500 lbs
QS™-15	6.47 m	20 ft 8 in	0.75 m	2 ft 5.5 in	4.47 m	14 ft 8 in	227 kg	500 lbs
QS™-20	8.02 m	25 ft 9 in	0.80 m	2 ft 7.5 in	6.02 m	19 ft 9 in	159 kg	350 lbs



A PLATFORM FOR EVERY JOB

AWP™ PLATFORM



STANDARD PLATFORM WITH SLIDING MIDRAIL
69 x 66 cm (27 x 26 in)
An excellent general-purpose platform.

EXCLUSIVE RUNABOUT™ PLATFORM OPTIONS

EXCLUSIVE RUNABOUT™ CONTRACTOR PLATFORM

STEEL PLATFORM AND EXTENSION DECK WITH SWING GATE
140 x 75 cm (55 x 29.5 in)
provides 44 cm (17.5 in) of horizontal outreach and allows up to 2 people in the platform.



STOCK PICKER™ PLATFORM
89 x 73 cm (35 x 28.5 in)
Offers dual side entry gates and adjustable tray.



SLIDING MID-RAIL EXTENSION DECK PLATFORM
140 x 75 cm (55 x 29.5 in)
Provides 51 cm (20 in) of horizontal outreach and a larger work area within the platform.

OPTIONS

FOR AERIAL WORK PLATFORMS

	AWP™-20S	AWP™-25S	AWP™-30S	AWP™-36S	AWP™-40S
POWER OPTIONS					
AC	O	O	O	O	O
DC	O	O	O	O	O
OTHER OPTIONS					
TILT-BACK OPTION	-	-	-	S	S
ACCESSORIES					
PLATFORM-LOCATING LASER LIGHT	O	O	O	O	O
OPERATIONAL WARNING LIGHT AND DESCENT ALARM PACKAGE	S	S	S	S	S

- = N/A O = OPTION S = STANDARD

TILT-BACK OPTION

A tilt-back frame allows select AWP™ Super Series models to roll through standard doorways. (standard on AWP™-36 and AWP™-40)





Notes

A series of horizontal lines for writing notes, starting below a blue header bar and extending to the bottom of the page.



Genie®

A TEREX BRAND

www.genieindustries.com

Genie Australia – Toll free number 1800 788 633

Brisbane (Head Office)
33 Kimberley Street
Darra QLD 4076

Sydney
74 Glendenning Road
Glendenning NSW 2761

Melbourne
374 Hammond Road
Dandenong VIC 3175

Perth
126 Sheffield Road
Welshpool WA 6106

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington
98073-9730

WORLDWIDE MANUFACTURING AND DISTRIBUTION

Australia • Brazil • Caribbean • Central America • China • France • Germany • Italy • Japan • Korea • Mexico
Southeast Asia • Spain • Sweden • United Arab Emirates • United Kingdom • United States

Effective Date: April 2012. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operators' Manual for instructions on the proper use of this equipment. Failure to follow the Operators Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks, or trade names of Terex Corporation, Terex South Dakota, Inc., and/or their subsidiaries in the USA and other countries. All rights reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. in the USA and many other countries. ©2009 Terex Corporation.